


# General information

## Cavity

Type series: AU/C1030

Dimensions and sectional view

Beispiel für die Masseinheit:  
Example for the dimensional units:  
0.79 = 0.79 mm millimeter

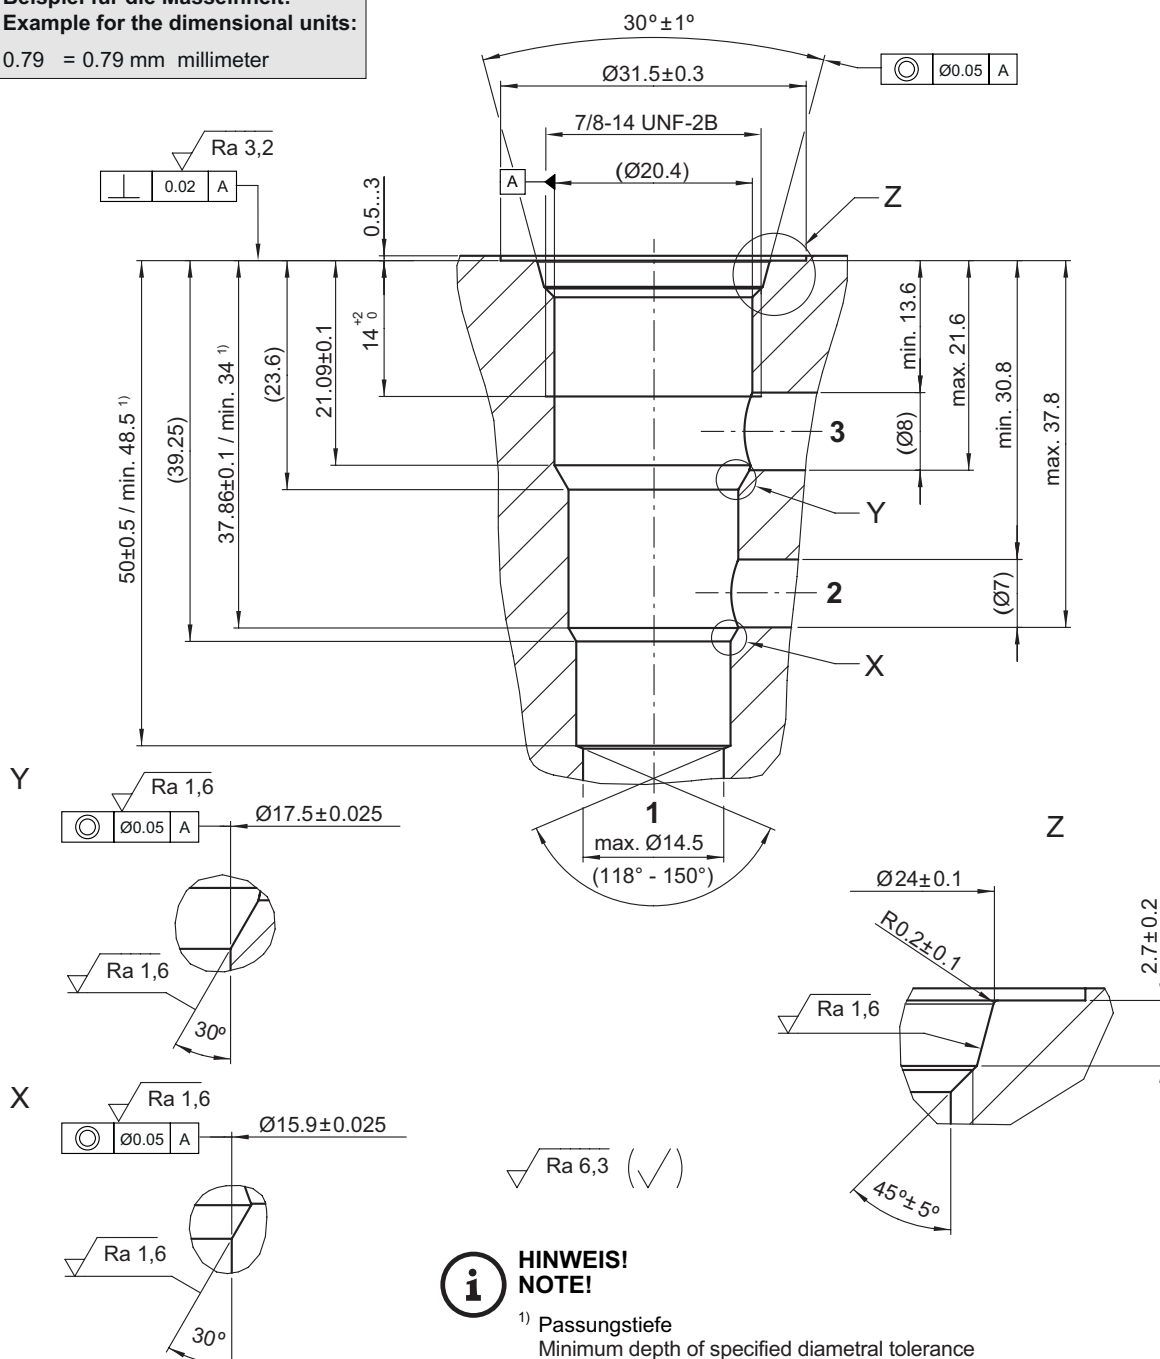

**HINWEIS!**  
**NOTE!**

<sup>1)</sup> Passungstiefe  
Minimum depth of specified diametral tolerance

## Installation information

**ATTENTION!**

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.

**NOTE!**

The cavity type AU/C1030 complies with the standard according to:  
ISO 17209: 7/8-03-0-13 and  
NFPA/T3.5.50: 0.875-03-0-09.

**NOTE!**

We offer form toolsets for sale or hire. For further information, see data sheet 400-P-040011.