


General information

Cavity

Type series: RCY

Dimensions and sectional view

Beispiel für die Masseinheit:
Example for the dimensional units:
0.79 = 0.79 mm millimeter

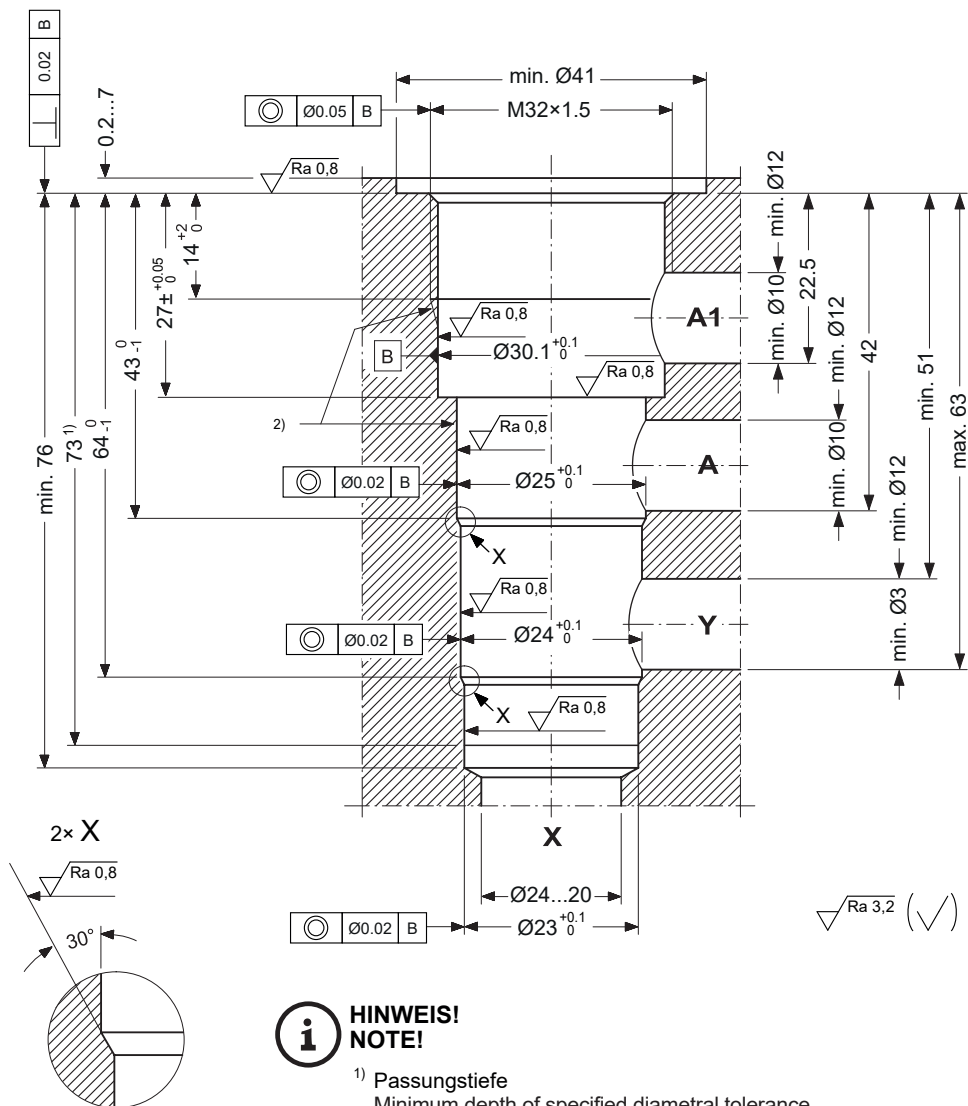

i HINWEIS!
NOTE!

- 1) Passungstiefe
Minimum depth of specified diametral tolerance
- 2) Der Gewindeauslauf darf die Ringfläche und Ø25 nicht verletzen.
The thread runout must not damage the ring surface or the Ø25.

Installation information



NOTE!

We offer form tool sets for sale or hire. See data sheet 400-P-040011 for further information.



NOTE!

Cavity type to factory standard.



ATTENTION!

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.