

Differential Lock Valve

DL14 (for 2 motors)



- Excellent traction at the lowest travel speeds
- Differential lock can be activated with low pressure (50 bar max.)
- Anti-shock and make-up valves can be incorporated to protect the system and prevent cavitation
- Bi-directional flow divider (dividing and adding/combining)
- Minimal pressure losses when lock is active

8 Description

8.1 General

The DL14 differential lock valve is a further development of our current product, with a focus on energy optimization and extended flow control range.

This lock valve is intended for use in hydrostatic drives with parallel-connected hydraulic motors in either open- or closed-loop mode. When the lock valve is switched off, the hydraulic flow can divide itself among the hydraulic motors

in any required ratio, and with minimal pressure losses.

When the lock valve is switched on, the hydraulic motors are compelled to operate in parallel, and the lock valve supplies load-independent flows from its outlet ports. This arrangement prevents the wheel from spinning in unfavorable ground conditions.


8.2 Application examples

- Agricultural equipment
- Forestry machines
- Construction equipment
- Municipal equipment


9 Symbols

9.1 Hydraulic actuation


without anti-shock and make-up valve

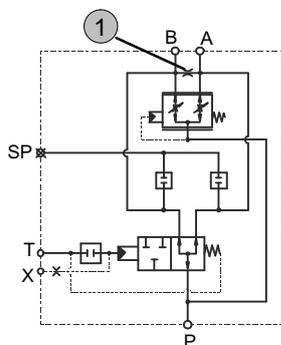

with make-up valve

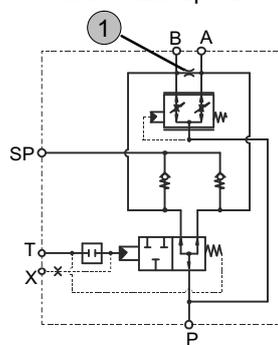


with anti-shock and make-up valve

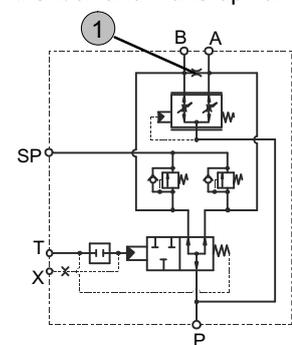


1 Balancing orifice can be fitted

9.2 Electrohydraulic actuation


without anti-shock and make-up valve

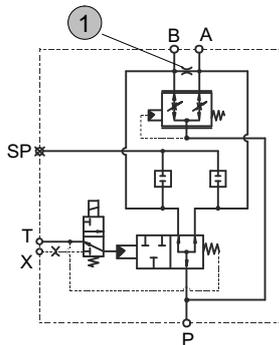

with make-up valve

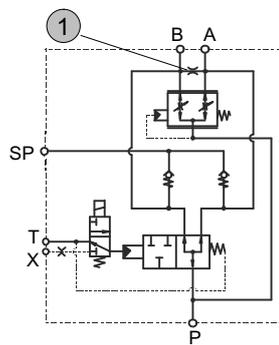

with anti-shock and make-up valve

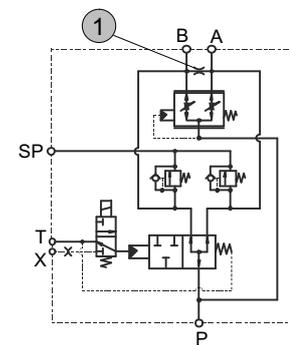

1 Balancing orifice can be fitted

10 Technical data

Hydraulic characteristics	Unit	Description, Value
Mounting attitude		Unrestricted; preferably horizontal
Q_{max} with switched valve ¹⁾	l/min	300
Nominal flow with connected valve	l/min	150
Q_{max} per output ¹⁾	l/min	3 ... 150
Nominal flow rate per connection	l/min	3 ... 75
Operating pressure p_{max}	bar	450
Peak pressure (max. 100000 duty cycles)	bar	520
Pilot pressure p_p min.- p_p max.	bar	10 ... 50
Viscosity range	mm ² /s	10 ... 300
Max. admissible level of contamination of the hydraulic fluid		ISO 4406 code 20/18/15, achievable with a filter rating of $\beta_{10} \geq 75$
Fluid temperature range	°C	-20 ... +80
Fluids		HL/HLP mineral oils DIN 51524; other fluids consult Bucher Hydraulics
Connection types P, A, B T, X, SP		SAE NG 25 M14x1,5
Electrical characteristics	Unit	Description, Value
Nominal voltage	V DC	12 or 24
Power consumption	W	27
Nitrile seals		NBR
Duty cycle		100 ED %
Ambient temperature	°C	max. +60
Coil temperature	°C	max. +180 (insulation class H)

Electrical characteristics	Unit	Description, Value
Enclosure protection (with properly mounted plug)		AMP Junior Timer (2-pole) IP65 Deutsch-plug, DT04-2P-EP04 IP67 (DIN EN 60529)
Electrical connection		AMP Junior Timer (2-pole) Deutsch-plug, DT04-2P-EP04

1) Extended working range see chapter 4.1.1 and 4.2.1.


The body of the DL14 is protected with a black primer (RAL 9004).

11 Performance graphs

Measured with viscosity 35 mm²/s.


11.1 Pressure drop of 2-fach differential lock valve

11.1.1 Pressure losses when dividing and adding

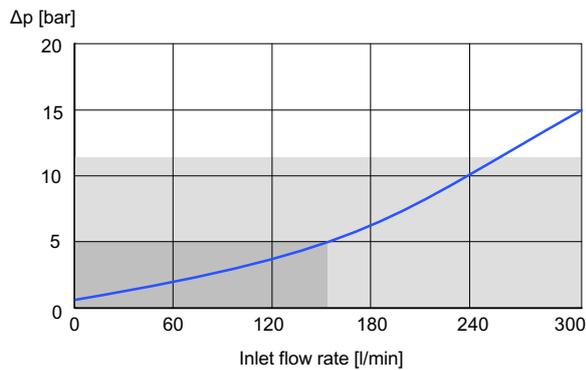


■ Nominal working range ■ Extended working range

11.1.2 Pressure losses when switched off

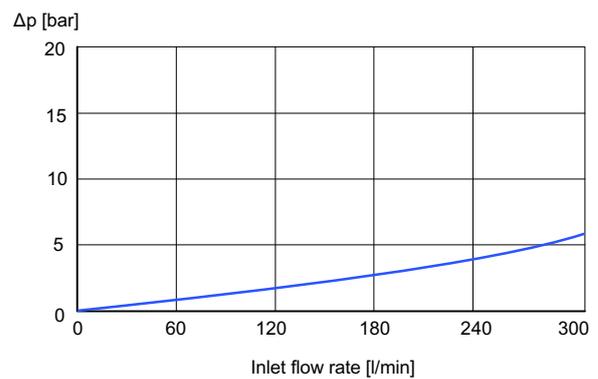


11.2 Division accuracy

11.2.1 Division accuracy to maximum flow rate

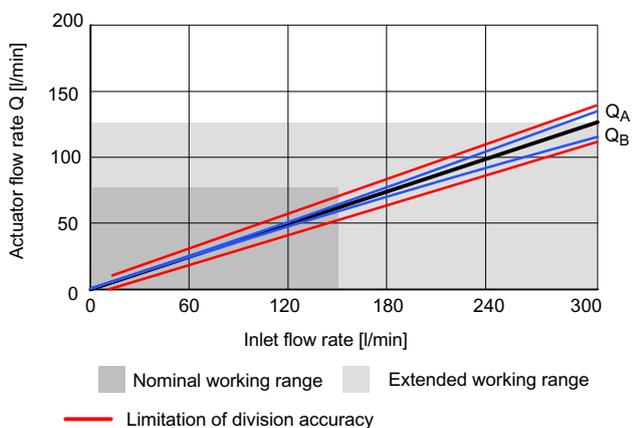

■ Nominal working range ■ Extended working range
— Limitation of division accuracy

12 Dimensions

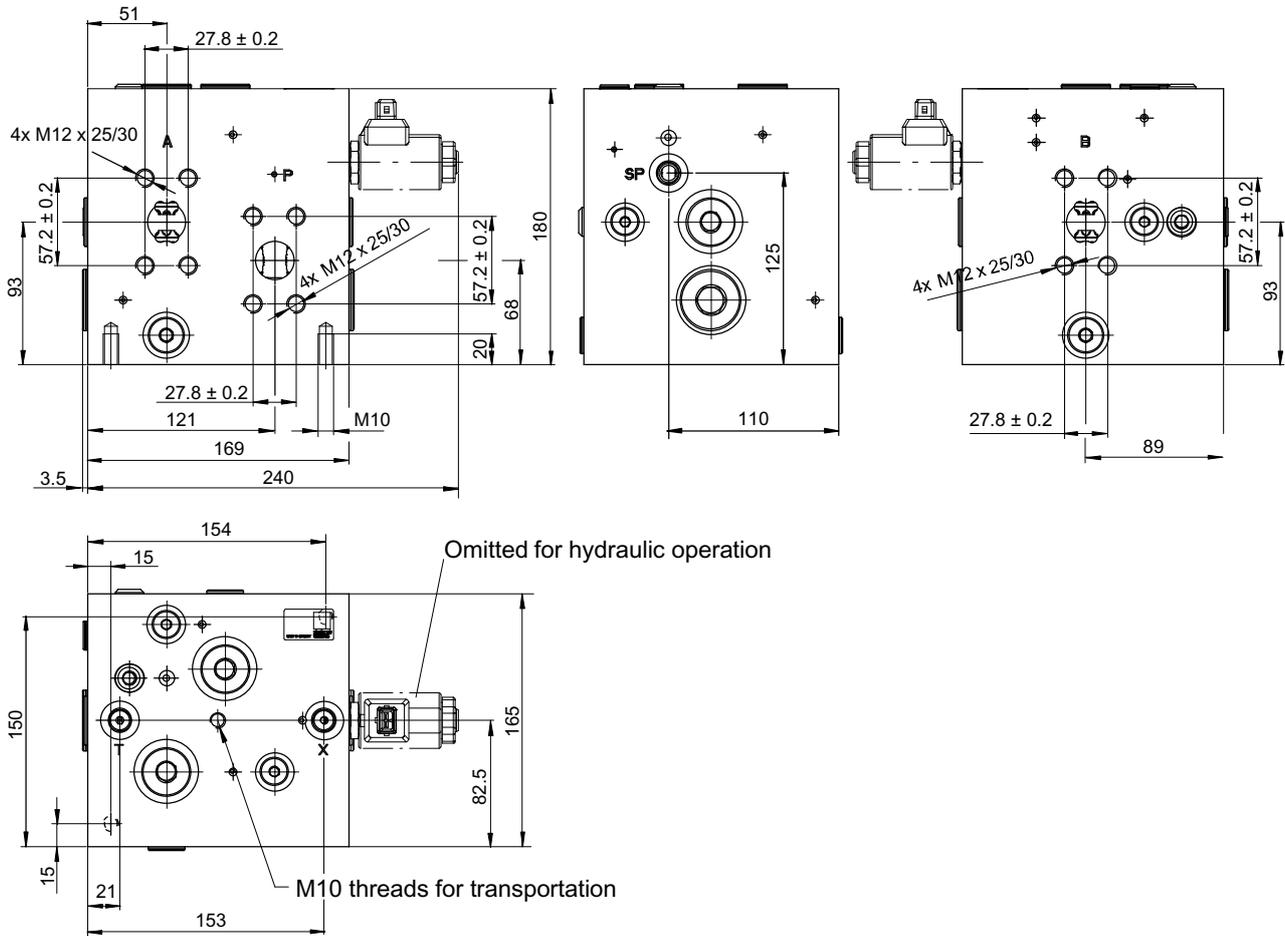

12.1 Connection sizes

Port	Port sizes
P, A, B	SAE NG 25
T, X, SP	M14 x 1,5

13 Versions

13.1 Plug bases

AMP Junior Timer J	DT04-2P-EP04 D
