

4/2 and 4/3 Directional Spool Valves, ISO Size 03

$Q_{max} = 40 \text{ l/min}$, $p_{max} = 160 \text{ bar}$
Direct acting, solenoid operated
Series WEDL...



- „Low Watt“ model (8W)
- Manifold-mounting design, interface to ISO 4401-03-02
- Operated by DC or AC solenoids
- Very reliable functions and extremely stable
- With manual override
- Solenoid coils can be changed quickly and easily without leakage from hydraulics system

1 Description

The WEDC-...-4... series of directional spool valves are solenoid operated, direct acting, manifold-mounting valves with a size 02 interface to ISO 4401-02-01. The main components of the valves are a steel body, either one or two solenoids, the control spool, and either one or two return springs. In the non-operated state, the return springs hold the control spool in the middle position or initial position. The control spool is operated by the DC or AC solenoids, which

are of the oil-immersed type. The integral manual override can be used to move the spool without energizing the coil, for example during a power failure. These 4/3 and 4/2 directional valves are used in plant and machines to control the direction of a flow, and to stop the flow. The slip-on coils can be replaced without opening the hydraulic envelope and can be positioned at any angle through $4 \times 90^\circ$.

2 Symbols / Spool types

4/2 functions	4/3 functions		
<p>WEDL-42-A...</p>	<p>WEDL-43-D...</p>		
	<p>WEDL-43-G...</p>		
<p>Crossover positions</p>	<p>WEDL-43-H...</p>		

NOTE! Other spool types on request.


3 Technical data

General characteristics		Description, value, unit
Designation		4/2 and 4/3 directional spool valves
Design		manifold mounting, direct acting, electrically operated
Mounting method		4 mounting holes for M5x30 mounting bolts (valve mounting bolts supplied with the valve)
Tightening torque		5.2 Nm ± 10 %
Size		size 03 interface to ISO 4401-03-02
Weight	- valve with one solenoid - valve with two solenoids	1.60 kg 2.10 kg
Mounting attitude		horizontal recommended (vertical mounting makes air bleeding difficult)
Ambient temperature range		-30 °C ... +80 °C
Hydraulic characteristics		Description, value, unit
Maximum operating pressure	- ports A, B, P - port T	160 bar 210 bar (static)
Maximum flow rate		40 l/min
Flow direction		see table "Symbols / Spool types"
Hydraulic fluid		HL and HLP mineral oil to DIN 51 524; HEES biodegradable fluids; Other fluids on request!
Hydraulic fluid temperature range		-30 °C ... +80 °C
Viscosity range		10...500 mm ² /s (cSt), recommended 15...250 mm ² /s (cSt)
Minimum fluid cleanliness Cleanliness class to ISO 4406 : 1999		class 20/18/15
Electrical characteristics		Description, value, unit
Supply voltage		24 V DC (50 ... 60 Hz)
Supply voltage tolerance		+5 % / -10 %
Nominal power consumption	DC	8 W
Switching time bei 40 l/min. Und 100 bar		45 ms (energizing) 28 ms (de-energizing) Depending on pressure, flow rate, pressure drop and viscosity as well as dwell time under pressure, the switching times may vary from the the stated values.
Relative duty cycle		100 %
Protection class to ISO 20 653 / EN 60 529		IP65 (with appropriate mating connector and proper fitting and sealing)
Electrical connection		DIN EN 175301-803, 3-pin 2 P+E (standard) for other connectors, see "Ordering code"


4 Performance graphs

measured with oil viscosity 33 mm²/s (cSt), coil at steady-state temperature and 10 % undervoltage

$\Delta p = f(Q)$ Pressure drop - Flow rate characteristic
A, D, G and H spool

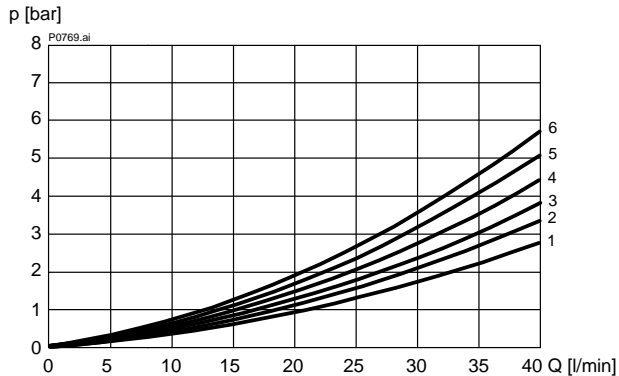

$p = f(Q)$ Performance limits - with DC-solenoid coil operating at 50 Hz

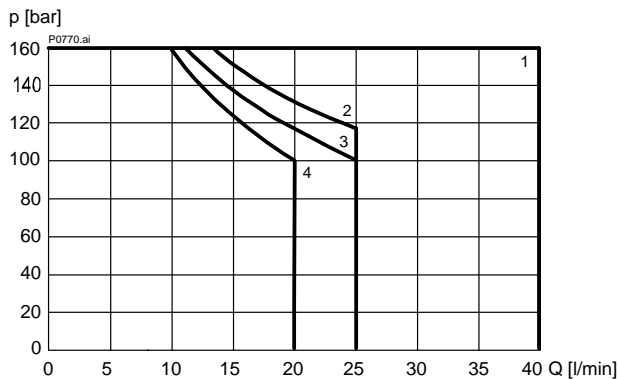

Spool type	Flow direction			
	P ⇒ A	B ⇒ T	P ⇒ B	A ⇒ T
A	6	5	6	5
D	5	2	5	2
G	6	1	6	1
H	4	2	4	2

Spool type	Flow direction
A	1
D	1
G	3
H	1



IMPORTANT!

The quoted max. flow rates apply when symmetrical flows pass through the valve.

For non-symmetrical flows, the max. flows are substantially reduced, in worst cases to only 33% of the above valves.

5 Installation information



ATTENTION!






Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.



IMPORTANT!

When fitting the valves, use the specified tightening torque for the mounting bolts. No adjustments are necessary, since the cartridges are set in the factory.

6 Dimensions & sectional view

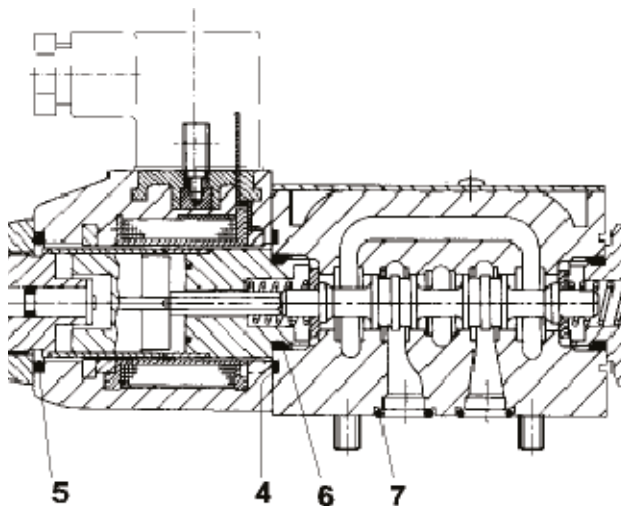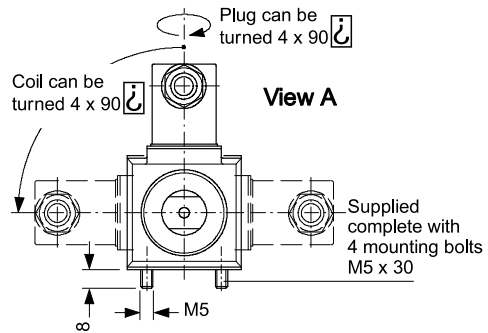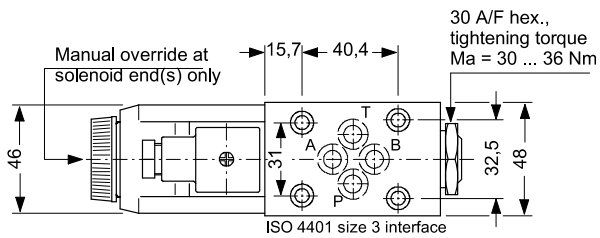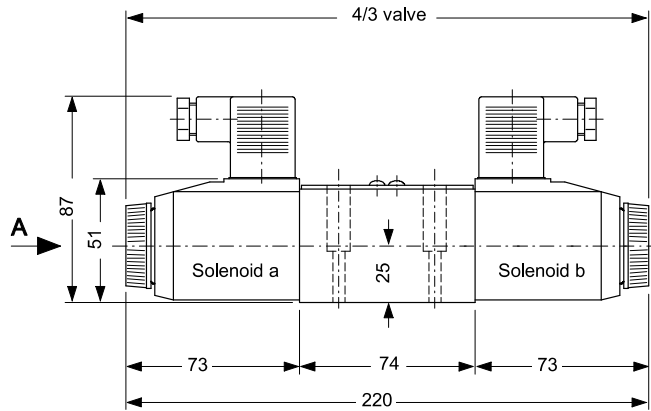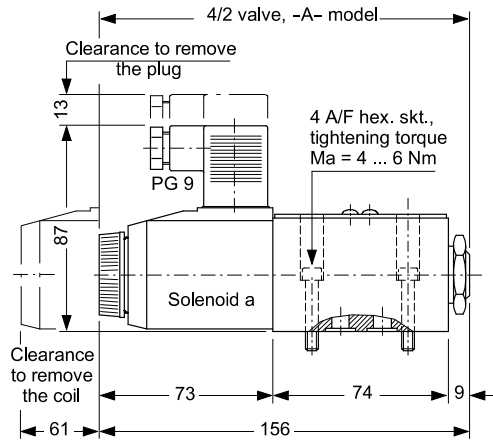

Seal kit NBR no. DS-150-V

Item	Qty.	Qty.	Description
4	2*	1**	O-ring no. 022 Ø 25,12 x 1,78 V70
5	2*	1**	O-ring no. 213 Ø 23,39 x 3,53 V70
6	2*	2**	O-ring no. 114 Ø 15,54 x 2,62 V70
7	4*	4**	O-ring no. 012 Ø 9,25 x 1,78 V70

* 4/3 valves


** 4/2 valves



IMPORTANT!

When fitting the valves, use the specified tightening torque for the mounting bolts. No adjustments are necessary, since the cartridges are set in the factory.

7 Ordering code

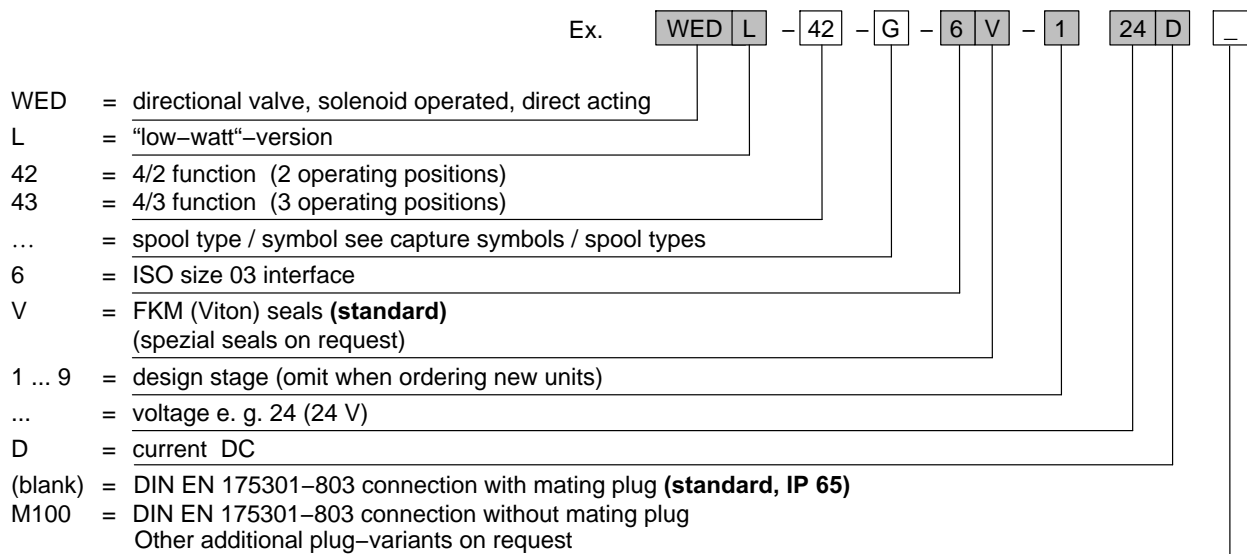

8 Related data sheets

Reference	(Old no.)	Description
400-P-030501	(i-31)	Size 03 interface to ISO 4401-03-02
400-P-515101	(P-20)	LRSA DIN plug

info.ch@bucherhydraulics.com

www.bucherhydraulics.com

© 2024 by Bucher Hydraulics AG Frutigen, CH-3714 Frutigen

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Classification: 430.300.-.315.305.300