

# Check valve

## Pilot operated check

$Q_{\max} = 21 \text{ gpm}$ ,  $p_{\max} = 6400 \text{ psi}$

hydraulic operation, pilot operated, poppet type

Type series: ERV 8-C-...




- Screw-in cartridge valve
- All external parts with zinc-nickel coating according to DIN EN ISO 19598
- Two-stage principle (decompression / main opening)
- Load pressure closing cone poppet valve
- Seat tight shut-off
- Compact construction
- Hardened, polished seat section and cone
- With rust water sealing for recessed installation

### Description

Series ERV 8-C-... check valves are size 8, pilot-operated, two stage, high performance screw-in valves with an M30x1,5 mounting thread. The valves are designed on the proven poppet/seat principle and are therefore leak-tight in the flow direction B to A. The check function can be overridden by applying a suitable pilot pressure at port X. In the flow direction A to B, flow can pass freely through the screw-in valves (opening

pressure = 36 psi). All external parts of the screw-in valves are zinc-nickel plated, and are thus suitable for use in the harshest operating environments. These valves are predominantly used in certain mobile and industrial applications to maintain the position of loaded actuators (e.g. outrigger cylinders) after the pump pressure has been disconnected.

### Symbol



## Technical Data

General Characteristics	Description, value, unit
Function group	Check valve
Function	Pilot operated check
Design	Screw-in cartridge valve
Controls	hydraulic operation
Characteristic	pilot operated, poppet type
Construction size	size 8
Thread size	M30×1,5
Mounting attitude	unrestricted
Weight	0.75 lb
Tightening torque steel	74 ft·lb
Tightening torque tolerance	± 10 %
Minimum ambient temperature	- 13 °F
Maximum ambient temperature	+ 212 °F
Surface protection	All external parts with zinc-nickel coating according to DIN EN ISO 19598
Available seal types	several seal types available, see ordering code
Seal kit order number	NBR: 30003008540 / FKM: 30003038560 / MIL: 30003018810

**i** **NOTE!**  
 Supplement to surface corrosion protection:  
 cartridge housing burnished

Hydraulic Characteristics	Description, value, unit
Maximum operating pressure	6400 psi
Maximum flow rate	21 gpm
Flow direction	see symbol
Hydraulic fluid	HL and HLP mineral oil according to DIN 51 524; other fluids on request!
Minimum fluid temperature	- 4 °F
Maximum fluid temperature	+ 176 °F
Viscosity range	2.8 ... 1500 mm <sup>2</sup> /s (cSt)
Recommended viscosity range	10 ... 380 mm <sup>2</sup> /s (cSt)
Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999)	class 20/18/15
Geometric Differential Area Ratio	2.1:1
Effective hydraulic pilot ratio (p.o. check valve)	1:2.5
Opening pressure	flow direction A to B: 36 psi

**i** **NOTE!**  
 In the field "Effective hydraulic pilot ratio (p. o. check valve)" you can find the pre-opening (decompression) ratio. In the field "Geometric opening pressure ratio" you can find the main opening ratio.


**i** **NOTE!**  
 E.g. with load pressure of 300 bar the decompression poppet opens when the control pressure  $X = 300 : 2.5 = 120$  bar and the cylinder retracts "slowly".  
 (The control pressure theoretically required for main opening =  $300 \times 2.1 = 630$  bar)

Performance graphs

measured with oil viscosity 33.0 mm<sup>2</sup>/s (cSt)

$\Delta p = f(Q)$  Pressure drop-flow rate characteristic


$\Delta p$  [bar (psi)]

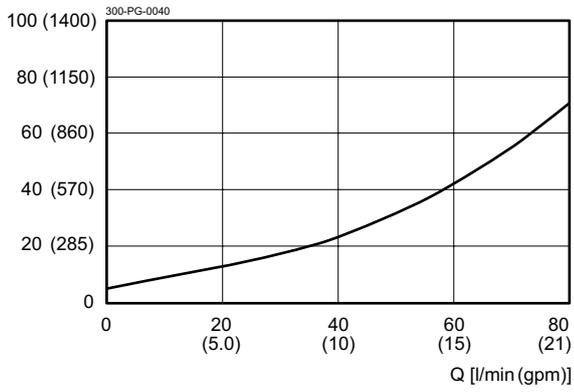

Flow direction A to B

$\Delta p = f(Q)$  Pressure drop-flow rate characteristic

$\Delta p$  [bar (psi)]

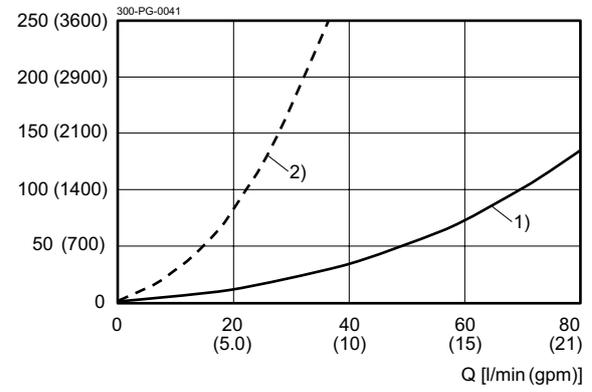


- 1) Main opening
- 2) Decompression

Flow direction B to A

Dimensions and sectional view

**Beispiel für die Masseinheit:**  
**Example for the dimensional units:**  
0.79 = 0.79 mm millimeter  
(.031) = 0.031" inch

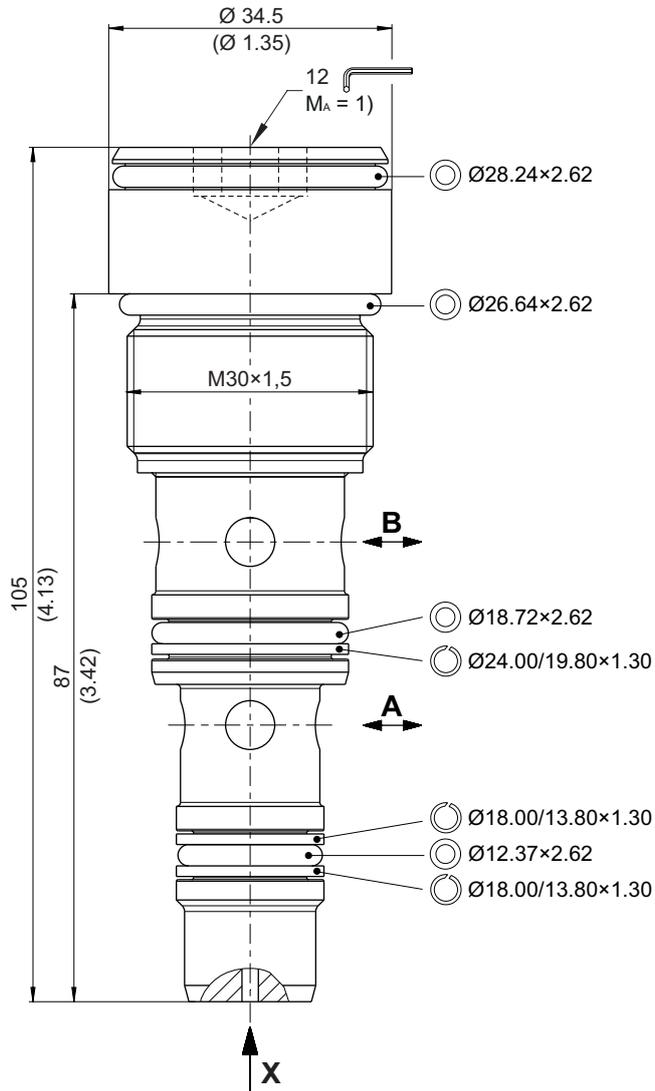

Installation information



**NOTE!**

1) When fitting the screw-in cartridge valve, use the specified tightening torque. The value can be found in the chapter "Technical data".



**NOTE!**

The seals are not available individually. The seal kit order number can be found in the chapter "Technical data".




**ATTENTION!**

Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.


Cavity

Beispiel für die Masseinheit:  
Example for the dimensional units:  
0.79 = 0.79 mm millimeter

**Variante 1 / variant 1**  
ohne Ansenkung  
without countersink

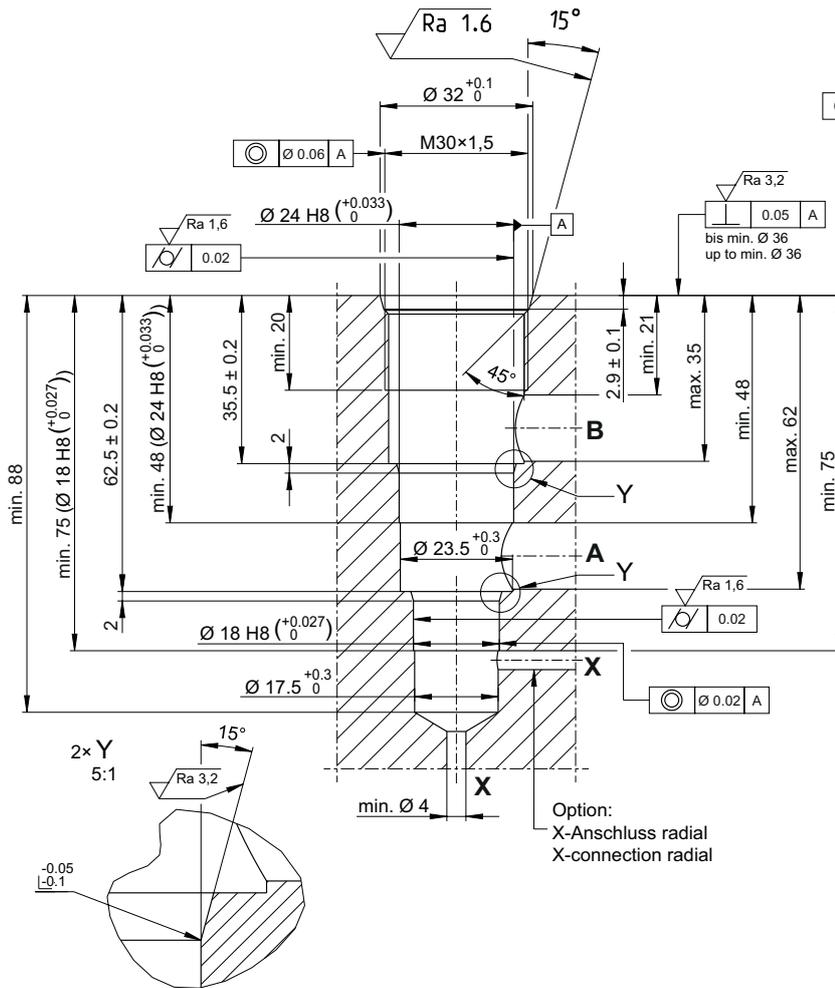

**Variante 2 / variant 2**  
mit Ansenkung für Rostwasserabdichtung  
with countersink for rust water sealing

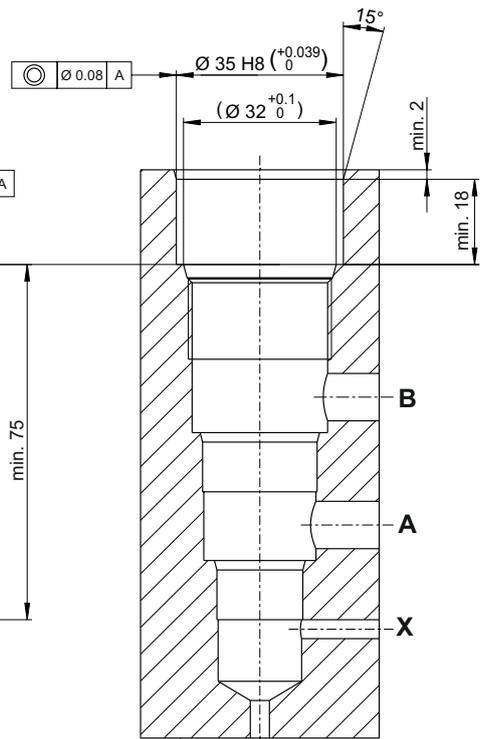


Restliche Masse siehe Variante 1  
Other dimensions see variant 1

**HINWEIS!**  
**NOTE!**

Empfohlene Anschlussbohrungen: A, B: Ø 10  
Recommended connection bores: X: Ø 4

Toleranzen nach: DIN ISO 2768-mK  
Tolerances according to: DIN ISO 2768-mK



**NOTE!**

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.

Ordering code

Ex. **ERV** **8** - **C** - **N**

- ERV = pilot operated cartridge check valve
- 8 = size 8
- C = version / technical design status
- N = NBR (nitril-butadien-rubber / BUNA) seals (*standard*)
- V = FKM (fluorocarbon rubber / VITON) seals
- T = MIL (low temperature) seals  
(*special seals - please consult BUCHER*)