


Flow valve

Flow control valve

$Q_{\max} = 80 \text{ l/min}$, $p_{\max} = 315 \text{ bar}$

direct acting, load-compensated, proportional solenoid with emergency override

Type series: SRCB-SNT-2

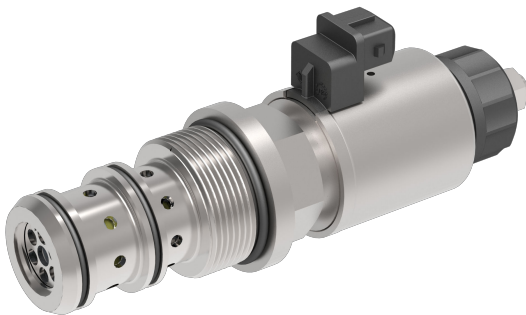


- Screw-in cartridge valve
- ZnNi plating (720h DIN EN ISO 9227 NSS)
- 2-way flow control valve
- Compact construction
- Flow rates are unaffected by changes in temperature and load
- The slip-on coil can be rotated, and it can be replaced without opening the hydraulic envelope
- Various plug-connector systems and voltages are available

Description

The flow control valve, series SRCB-SNT-2 is a direct acting, load compensated screw-in valve with an M42x1.5 mounting thread. This valve is used to set the working speed of hydraulic actuators, the setting being load-independent. The special orifice design ensures that the flow setting is largely independent of the viscosity of the fluid. The cartridge design allows

the valve to be installed in any customized control block. All external parts of the screw-in valve are zinc-nickel plated and are thus suitable for use in the harshest operating environments. The slip-on coil can be replaced without opening the hydraulic envelope and can be positioned at any angle through 360°.

Symbol

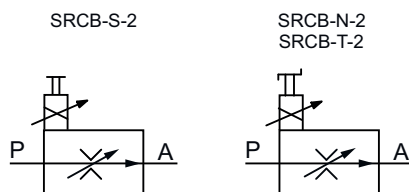

Technical data

General characteristics	Description, value, unit
Function group	Flow valve
Function	Flow control valve
Design	Screw-in cartridge valve
Controls	proportional solenoid with emergency override
Characteristic	direct acting, load-compensated
Neutral position	closed orifice
MTTFd value	150 years
Thread size	M42×1,5
Mounting attitude	unrestricted (preferably vertical, coil down)
Tightening torque aluminium	50 Nm
Minimum ambient temperature	- 30 °C
Maximum ambient temperature	+ 50 °C
Surface protection	ZnNi plating (720h DIN EN ISO 9227 NSS)
Sealing material	FKM (fluorocarbon rubber / VITON) seals

Hydraulic characteristics	Description, value, unit
Maximum operating pressure	315 bar
Maximum flow rate	80 l/min
Control flow range	10, 16, 25, 32, 40, 50, 63, 80 l/min
Flow direction	see symbol
Hydraulic fluid	HL and HLP mineral oil according to DIN 51 524; other fluids on request!
Minimum fluid temperature	- 20 °C
Maximum fluid temperature	+ 80 °C
Viscosity range	10 ... 300 mm ² /s (cSt)
Minimum fluid cleanliness (cleanliness class according to ISO 4406:1999)	class 20/18/15
Min. pressure difference (pressure compensator)	7 bar
Control accuracy (related to the nominal flow rate)	Load-dependency when under pressure: max. ± 2.5 % Hysteresis when operated: max. ± 3.5 %
Internal leakage flow rate	max. 150 cm ³ /min at 100 bar

i NOTE!
Values refer to an oil viscosity of 35mm²/ [cSt].

i NOTE!
For other values please contact Bucher Hydraulics.

i NOTE!
Control accuracy depends on the selected flow range.

Electric characteristics	Description, value, unit
Solenoid coils type	D45/22
Features solenoid coil	pressure-tight, switching in oil
Supply voltage DC	12/24 V DC
Nominal power consumption	16 W
Relative duty cycle	100 %

Electric characteristics	Description, value, unit
Recommended PWM frequency	100 Hz
Electrical connection coil	several connection types available, see ordering code
Protection class solenoid coil to ISO 20 653 / EN 60 529	several classes of protection available, see ordering code (with appropriate mating connector and proper fitting and sealing)


NOTE!
For other values please contact Bucher Hydraulics.

Performance graphs

measured with oil viscosity 35.0 mm²/s (cSt)


$Q = f(\Delta p; I)$ Flow rate adjustment

Q [%]

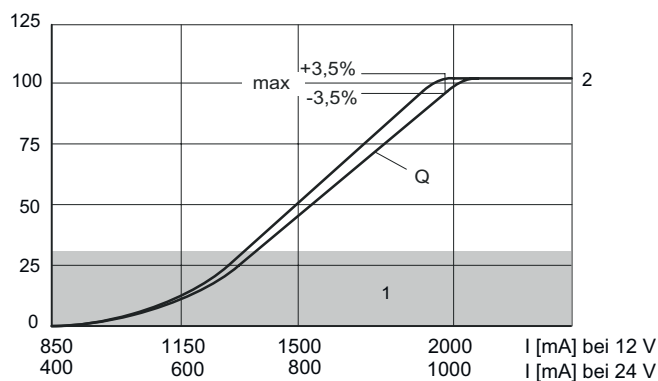


$Q = f(p_l)$ Flow rate load-pressure

Load characteristic $Q = f(\Delta p (p_E - p_A))$

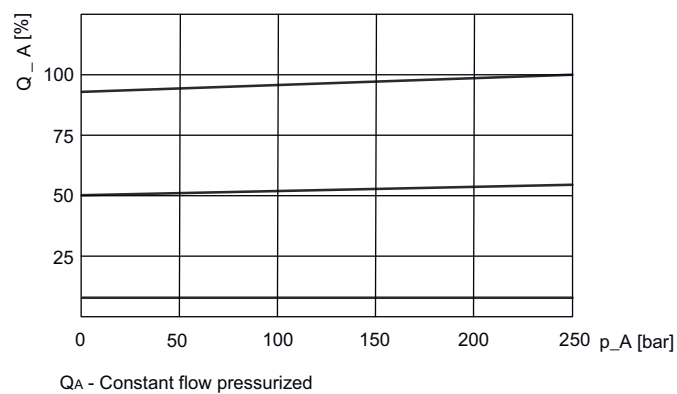

Dimensions and sectional view

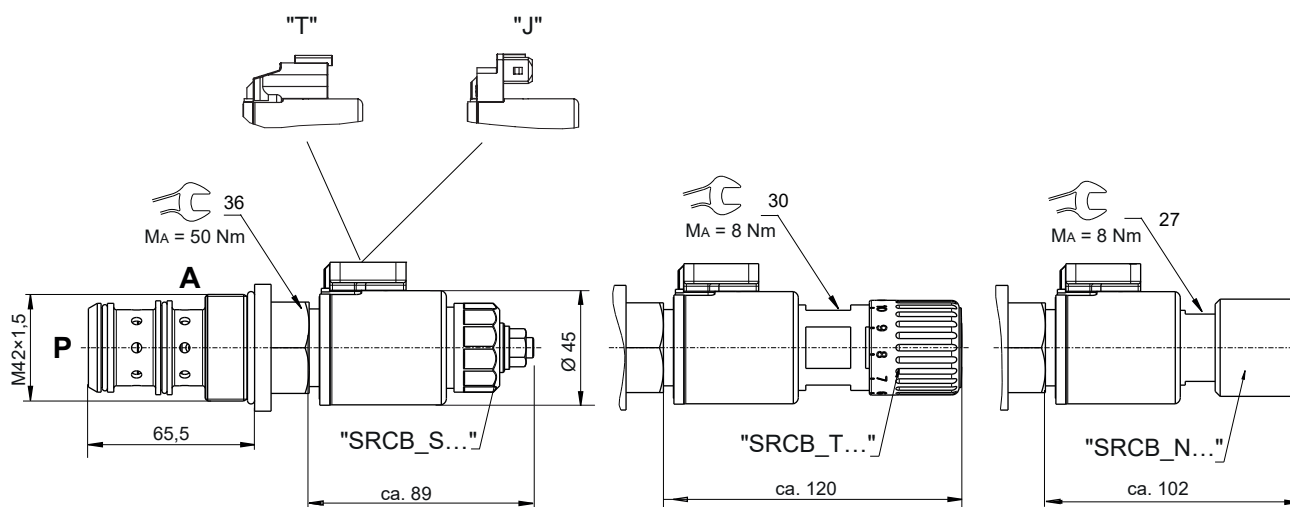

Installation information



ATTENTION!

Expert and product knowledge is required for the layout of this valve type. Use exclusively for the intended purpose within the indicated values. The valve manufacturer must be consulted for use of the appliance outside the specifications. All applications must be verified by sufficient tests to ensure safety in the application. The ultimate responsibility for safety during installation and use resides with the end appliance manufacturer.

All limit values listed in the data sheet apply to typical mobile hydraulic applications with a max. rate of pressure rise of 4000 bar (higher values after consultation).



ATTENTION!

Only qualified personnel with mechanical skills may carry out any maintenance work. Generally, the only work that should ever be undertaken is to check, and possibly replace, the seals. When changing seals, oil or grease the new seals thoroughly before fitting them.



NOTE!

When fitting the screw-in cartridge valve, use the specified tightening torque. The value can be found in the chapter "Technical data".

We offer form tool sets for sale or hire.


Description: 1835 A D32 (Id. No.: 100603875).



NOTE!

Bleed all air from the system (if possible, operate valve several times without load).

Models of the emergency override

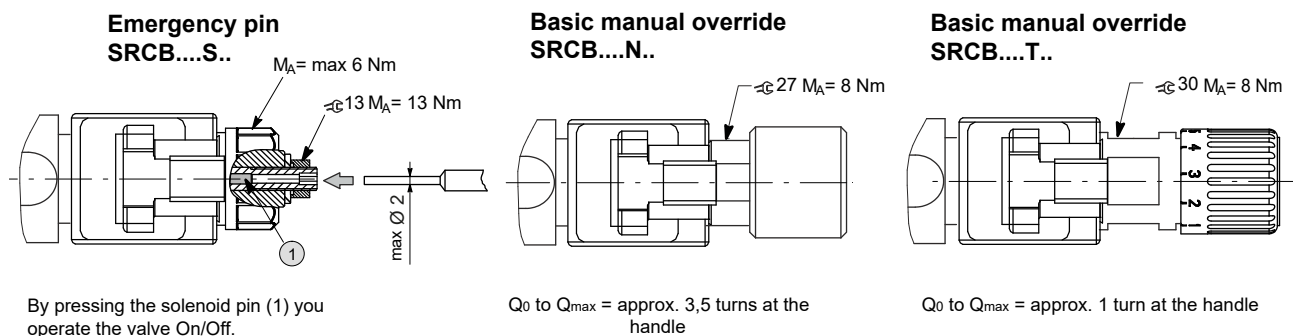

info.de@bucherhydraulics.com

www.bucherhydraulics.com

© 2025 by Bucher Hydraulics GmbH, 79771 Klettgau, Germany

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.