

Valve accessory

Threaded port body

Type series: GHF-34...




- For cavity HF/C1220A
- All external parts with zinc-nickel plating according to DIN EN ISO 19598
- Functionless threaded port body
- Port sizes of the main connections G 3/4"
- Optimized Δp values
- Suitable for piping assembly
- Can be fixed with 2× cap screws

Technical data

General characteristics	Description, value, unit
Function group	Valve accessory
Function	Threaded port body
Maximum operating pressure	420 bar
Weight	2 kg
Cavity acc. factory standard	For cavity HF/C1220A
Surface protection	All external parts with zinc-nickel plating according to DIN EN ISO 19598

Dimensions and sectional view

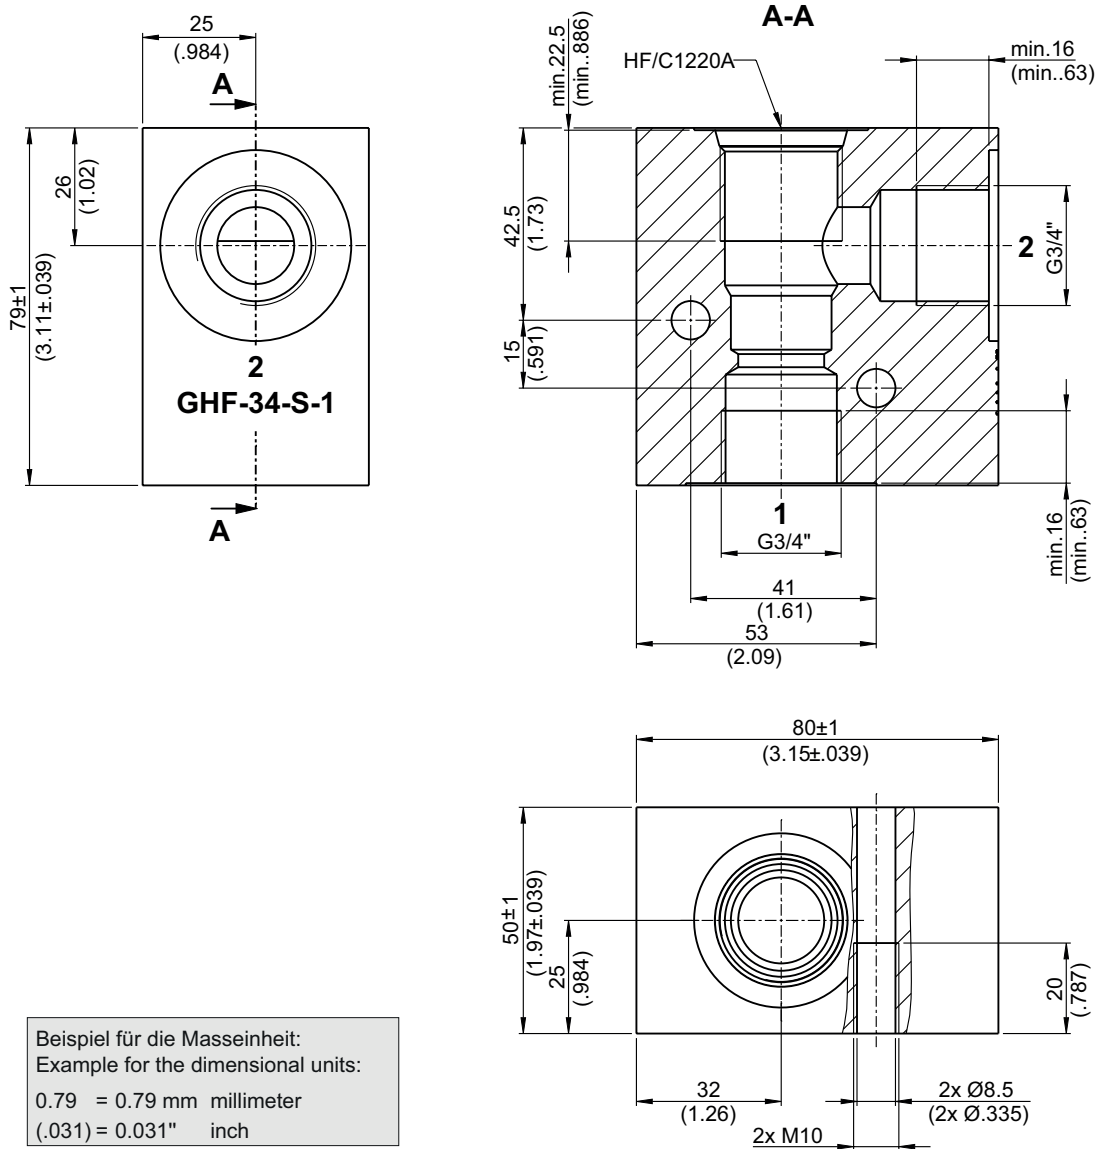

Ordering code

z. B. **GHF** - **34** - **S** - **1**

- GHF = Gewindeanschlusskörper für Bohrungsform HF/C1220A
- 34 = Anschlussgrösse der Hauptanschlüsse G 3/4"
- S = Materialausführung Stahl (Standard)
- A = Materialausführung Aluminium mit eingeschränkten Leistungsdaten (auf Anfrage)
- 1...9 = Technischer Stand (bei Bestellung weglassen)